


## HOW TO USE THE GRAND TRANSPORTER

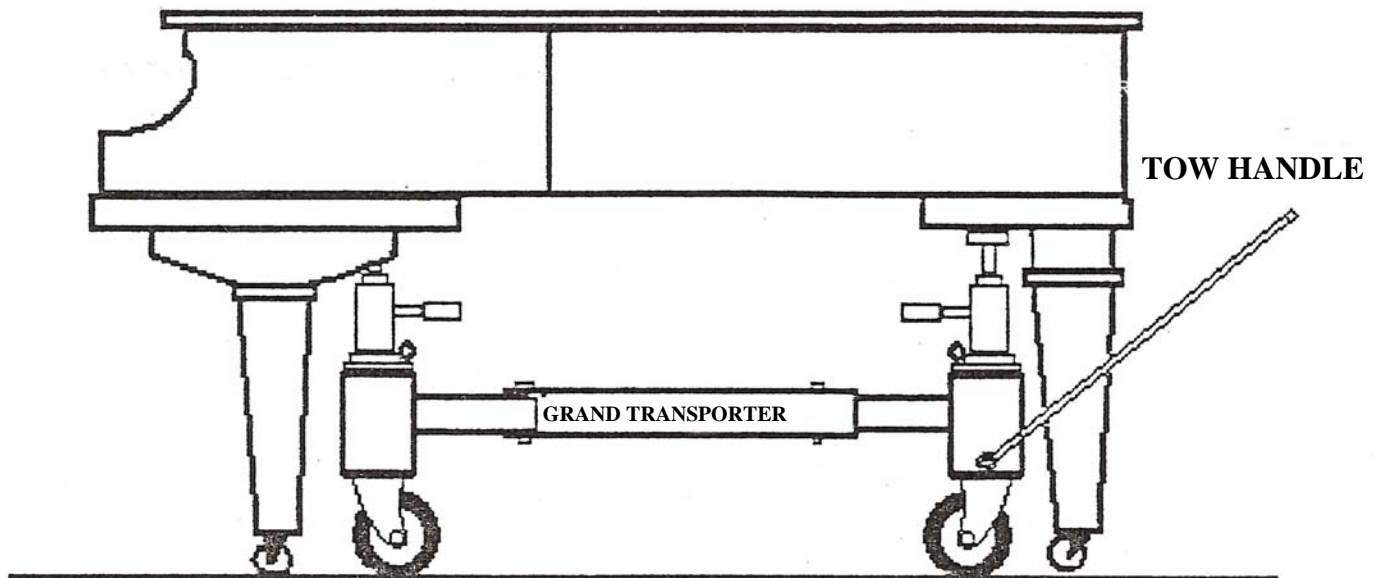

1. Swing both arms 2 and 3 out into the LOCK position.
2. Place Grand Transporter under piano with two front arms under key bed and between front legs.
3. Raise one jack up firm against key bed to keep in place.
4. Spin cross bar up until 1" from rear leg block.
5. Remove rear lock pin and extend tail until back near the leg, but not touching rear leg and put lock pin into the locking hole which aligns the closest.
6. Close jack valve tight and pump jack until firmly against piano bottom. Be sure the load on the cross bar is centered or equal on both sides.
7. Raise other front jack until against bottom of key bed.
8. Pump up each jack until piano casters are 1" to 2" off the floor.

You are now ready to move piano.